

**Implementation policy
to
EDIFACT-SUBSET
EDITEC
RETINS**

**RETINS
Version 4.2**

Table of contents

Introduction	3
Message Struktur	4
Message Diagramm	5
Segments	7
Example	46

Introduction

This implementation guideline for the EDIFACT subset 'Return Instructions' was created by ITEK on behalf of the Working Group for New Media in the German Sanitary Industry (Arbeitsgemeinschaft Neue Medien der deutschen Sanitärindustrie e.V.) and the German Wholesale Association for Building Services (Deutscher Großhandelsverband Haustechnik e.V.).

ITEK
Technologiepark 20
33100 Paderborn

Telefon: (0 52 51) 16 14 –0
Telefax: (0 52 51) 16 14 –99
E-Mail: editec@itekmbh.de

The EDIFACT subset is based on EDIFACT syntax version 3 and the following public documents:

- EDIFACT – Uniform message type 'DESADV'
- UN/EDIFACT Directory 96B, UN/ECE/TRADE/WP.4
- EDIFACT Application Guideline Service Segments, Draft DIN 16560 Part 1, February 1994
- UN/EDIFACT Code List D.97A

Paderborn, im September 2025


Message Structure

UNA	1	M	1	- Delimiter Specification
UNB	2	M	1	- User Data Header Segment
UNH	3	M	1	- Message Header Segment
BGM	4	M	1	- Start Of The Message
DTM	5	M	1	- Document date
FTX	6	C	1	- Additional text
FTX	7	C	1	- Standard texts due to legal requirements
SG3		M	1	- Manufacturer
NAD	8	M	1	- Name and Address
SG5		C	1	- CTA-COM
CTA	9	M	1	- Communication Partner
COM	10	C	3	- Communication link
SG3		M	1	- Wholesaler
NAD	11	M	1	- Name and Address
SG5		C	1	- CTA-COM
CTA	12	M	1	- Communication Partner
COM	13	C	3	- Communication link
SG3		C	1	- Different subscription address
NAD	14	M	1	- Name and Address
SG5		C	1	- CTA-COM
CTA	15	M	1	- Communication partner
COM	16	C	3	- Communication link
SG3		C	1	- Freight Forwarder
NAD	17	M	1	- Name and Address
SG4		C	1	- RFF
RFF	18	M	1	- Reference Details
SG5		C	1	- CTA-COM
CTA	19	M	1	- Communication partner
COM	20	C	3	- Communication link
SG3		C	1	- Return delivery address
NAD	21	M	1	- Name and Address
SG5		C	1	- CTA-COM
CTA	22	M	1	- Communication Partner
COM	23	C	3	- Communication link
SG11		M	9999	- LIN-PIA-IMD-QTY-SG13-SG18
LIN	24	M	1	- Position Data
PIA	25	C	9	- Additional product identification
IMD	26	C	2	- Specification of the item
QTY	27	M	1	- Quantity
SG13		M	1	- RFF-DTM
RFF	28	M	1	- Reference Details
DTM	29	M	9	- Date/time/period
SG18		C	1	- Reason for Rejection
CDI	30	M	1	- Item Status / Reason for Rejection
FTX	31	C	1	- Free text
SG18		C	5	- Desired action
CDI	32	M	1	- Item Status
DTM	33	C	2	- Date/Time/Period Details
FTX	34	C	1	- Free Text
UNT	35	M	1	- Message End Segment
UNZ	36	M	1	- Data Segment End


St = Status

EDIFACT: M=Mandatory, C=Conditional

Application: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used, X=Not used



Message Structure

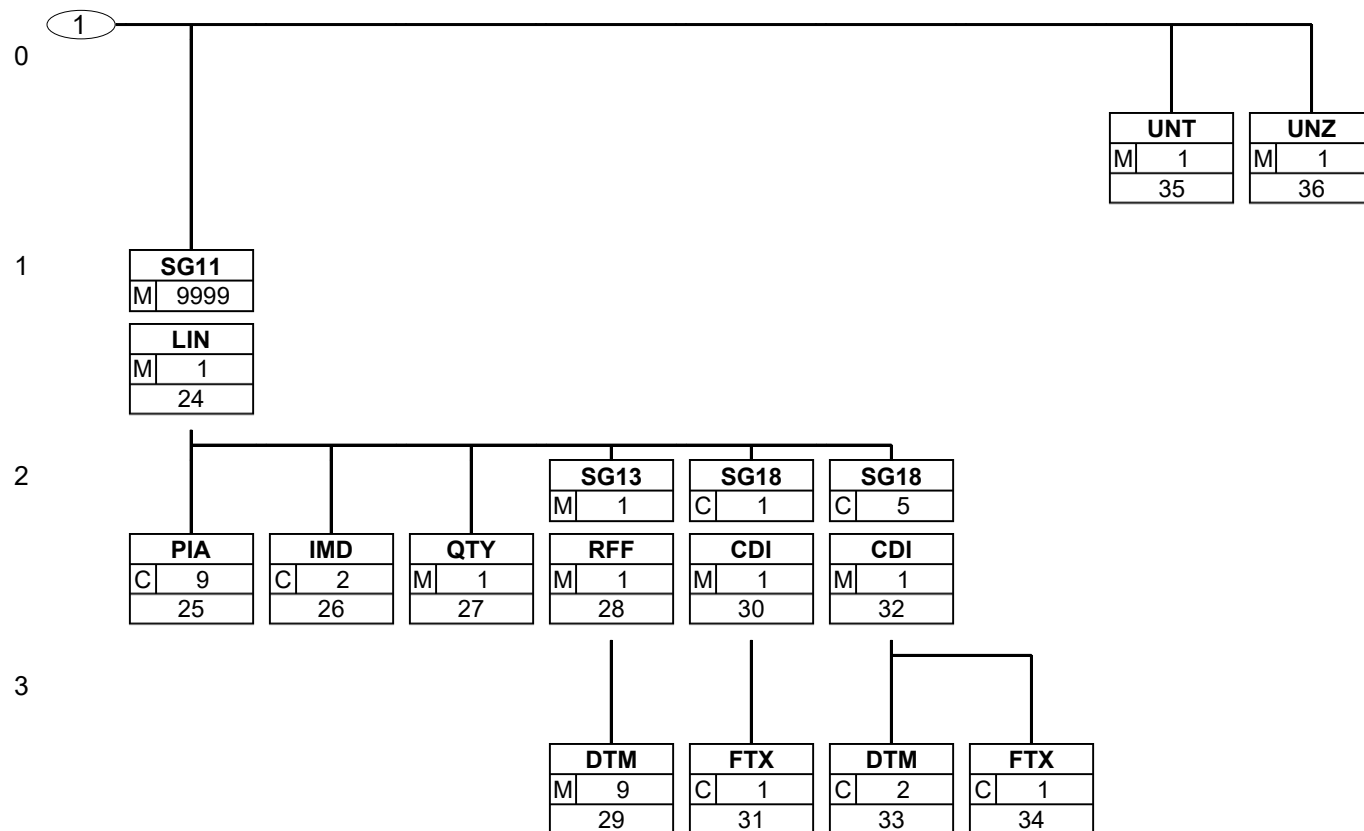

Status: M=Mandatory, C=Conditional, R=Required, O=Optional, D=Dependent, A=Advised, N=Not used, X=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0000	1	UNA	M	1	0	Delimiter Specification
------	---	------------	---	---	---	--------------------------------

Tag	Name	St	Format	Usage / Comments
UNA				
UNA1	: Separator	M	an1	Separates data elements within a data element group. : Constant
UNA2	#NAME?	M	an1	Separates segment identifiers, data element groups, and data elements. + Constant
UNA3	, Decimal mark (comma)	M	an1	, Constant
UNA4	? Release character	M	an1	Restores the original meaning to the character following the release character. ? Constant
UNA5	Spaces	M	an1	Reserved for future applications
UNA6	Segment terminator	M	an1	' Constant

Description: In the UNA segment, the delimiter, decimal, and release characters are defined. These characters are defined only once and apply to subsequent messages until further notice. Therefore, they are not transmitted again.

Example: UNA: +, ? ' '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0000	2	UNB	M	1	0	User Data Header Segment

Tag	Name	St Format	Usage / Comments
UNB			

Description: In the UNB segment, details regarding the syntax, the sender/recipient of the transmission file, the date/time of creation, and a data exchange reference are transmitted. Optionally, a recipient's password may also be transmitted.

Example: UNB

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0010	3	UNH	M	1	0	Message Header Segment

Tag	Name	St	Format	Usage / Comments
UNH				

Description: In the UNH segment, a message is uniquely identified. The EDITEC subset Goods Return Instruction is based on the message type RETINS.

Example: UNH

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0020	4	BGM	M	1	0	Start Of The Message
------	---	------------	---	---	---	----------------------

Tag	Name	St Format	Usage / Comments
BGM			
C002	DOCUMENT/MESSAGE NAME	M	
1001	Document/Message Name, Coded	M an..3	The following codes are available: 71E Instruction for goods return (GS1 code)
C106	DOCUMENT/MESSAGE IDENTIFICATION	C	
1004	Document/Message Number	M an..35	Document number assigned by the sender.
1225	Message function code	C an..3	9 Original

Description: In the BGM segment, the use and name of the message are specified.

Example: BGM+71E+1+9 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0030	5	DTM	M	1	1	Document date
------	---	------------	---	---	---	---------------

Tag	Name	St	Format	Usage / Comments
DTM				
C507	Date/time/period	M		
2005	Date/Time/Period Details, Qualifiers	M	an..3	137 Document date
2380	Date/Time/Period Details	M	an..35	
2379	Date/Time/Period Details, Format, Qualifier	M	an..3	102 Date format YYYYMMDD

Example: DTM+137:20211231:102'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0040	6	FTX	C	1	1	Additional text

Tag	Name	St Format	Usage / Comments
FTX			
4451	TEXT, QUALIFIER	M an..3	The following codes are available: ORI Additional text for order confirmation
4453		N	Not used in the subset.
C107		N	
4441		N	Not used in the subset.
C108	FREE TEXT	M	
4440	Free Text	M an..512	
4440	Free Text	C an..512	
4440	Free Text	C an..512	
4440	Free Text	C an..512	
4440	Free Text	C an..512	

Description:

In the FTX segment, additional text is provided. This is a free text.

Example:

FTX+ORI+++Hier steht:der ORI Text:als freier Text:Hier kann ein:beliebiger Text stehen'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0040	7	FTX	C	1	1	Standard texts due to legal requirements

Tag	Name	St	Format	Usage / Comments
FTX				
4451	TEXT, QUALIFIER	M	an..3	These texts can be overlooked by wholesalers and do not lead to manual processing or routing of the invoice at the wholesale level. The following codes are available: OSI Standard texts due to legal requirements
4453		N		Not used in the subset.
C107		N		
4441		N		Not used in the subset.
C108	FREE TEXT	M		
4440	Free Text	M	an..512	
4440	Free Text	C	an..512	
4440	Free Text	C	an..512	
4440	Free text	C	an..512	
4440	Free Text	C	an..512	

Description: In the FTX segment, a standard text is specified due to legal requirements. This is a free text.

Example: FTX+OSI+++Hier steht: ein Text aufgrund von gesetzlichen Anforderungen'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0120		SG3	M	1	1	Manufacturer
------	--	------------	---	---	---	---------------------

This segment group includes the NAD segment as well as segment groups 3 and 4, and is used to specify the partners involved in the message and their contacts.

0130	8	NAD	M	1	1	Name and Address
------	---	------------	---	---	---	-------------------------

Tag	Name	St	Format	Usage / Comments
NAD				
3035	PARTNER, QUALIFIER	M	an..3	The following codes are available: SU Manufacturer (Industry)
C082	IDENTIFICATION OF THE PARTNER	M		
3039	Partner identification number, coded	M	an..35	Depending on the qualifier mentioned above, the partner's identification number is provided here.
1131		N		Not used in the subset.
3055	Managing organisation, coded	M	an..3	The following codes are available: 9 GLN (GS1 as the German issuer of GLN numbers) ZZZ bilaterally agreed (customer or supplier numbers)
C058		N		
3124		N		Not used in the subset.
C080	PARTNER NAME	C		
3036	Partner Name 1	M	an..35	Partner Name 1
3036	Partner Name 2	C	an..35	Partner Name 2.
3036	Partner Name 3	C	an..35	Partner Name 3.
C059	STREET	C		
3042	Street and house number	M	an..35	Building name/number and street name
3164	LOCATION	C	an..35	
C819		N		
3229		N		Not used in the subset.
3251	POSTCODE	C	an..17	
3207	COUNTRY, CODED	C	an..3	The most important country codes according to ISO 3166 (postal codes must be indicated on the delivery note papers): AT Austria BE Belgium BG Bulgaria CA Canada CH Switzerland DE Germany DK Denmark ES Spain FI Finland FR France GB United Kingdom GR Greece IE Ireland IT Italy LU Luxembourg NL Netherlands NO Norway PT Portugal SE Sweden TR Turkey US USA

Description: In the NAD segment, details for identifying the involved partners as well as key address information are transmitted.

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

RETINS

Segment descriptions

Example: NAD+SU+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt+
+12345+DE'

No = Consecutive segment number	St = Status
MaxOcc = Maximum occurrence of the segment/group	EDIFACT: M=Mandatory, C=Conditional
Counter = Counter of segment/group within the standard	User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180 **SG5** C 1 2 **CTA-COM**

This segment group contains the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0190 9 **CTA** M 1 2 **Communication Partner**

Tag	Name	St	Format	Usage / Comments
CTA				
3139		N		Not used in the subset.
C056	DEPARTMENT OR STAFF DETAILS	M		
3413		N		Not used in the subset.
3412	Department or Processor	M	an..256	Name of the clerk or department.

Description: In the CTA segment, the name of the clerk responsible for the process can be transmitted for both the sender and the receiver.

Example: CTA++:Max Mustermann '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180		SG5	C	1	2	CTA-COM
------	--	------------	---	---	---	----------------

This segment group contains the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0200	10	COM	C	3	3	Communication link
------	----	------------	---	---	---	---------------------------

Tag	Name	St	Format	Usage / Comments
COM				
C076	COMMUNICATION CONNECTION	M		
3148	Communication number	M	an..512	
3155	Communication channel/service, qualifier	M	an..3	The following codes are available: EM E-Mail FX Fax TE Telephone

Description: A segment for specifying the communication number and type for the contact or department indicated in the CTA segment.

Example: COM+max_mustermann@e_mail.de:EM'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0120 **SG3** M 1 1 **Wholesaler**

This segment group includes the NAD segment as well as segment groups 3 and 4, and is used to specify the partners involved in the message and their contacts.

0130 11 **NAD** M 1 1 **Name and Address**

Tag	Name	St	Format	Usage / Comments
NAD				
3035	PARTNER, QUALIFIER	M	an..3	The following codes are available: WS Wholesaler
C082	IDENTIFICATION OF THE PARTNER	M		
3039	Partner identification number, coded	M	an..35	Depending on the qualifier mentioned above, the partner's identification number is provided here.
1131		N		Not used in the subset.
3055	Managing organisation, coded	M	an..3	The following codes are available: 9 GLN (GS1 as the German issuer of GLN numbers) ZZZ bilaterally agreed (customer or supplier numbers)
C058		N		
3124		N		Not used in the subset.
C080	PARTNER NAME	C		
3036	Partner Name 1	M	an..35	Partner Name 1
3036	Partner Name 2	C	an..35	Partner Name 2.
3036	Partner Name 3	C	an..35	Partner Name 3
C059	STREET	C		
3042	Street and house number	M	an..35	Building name/number and street name
3164	LOCATION	C	an..35	
C819		N		
3229		N		Not used in the subset.
3251	POSTCODE	C	an..17	
3207	COUNTRY, CODED	C	an..3	The most important country codes according to ISO 3166 (postal codes must be indicated on the delivery note documents): AT Austria BE Belgium BG Bulgaria CA Canada CH Switzerland GB United Kingdom DK Denmark ES Spain FI Finland FR France GB United Kingdom GR Greece IE Ireland IT Italy LU Luxembourg NL Netherlands NO Norway PT Portugal SE Sweden TR Turkey US USA

Description: In the NAD segment, details for the identification of the involved partners as well as key address information are transmitted.

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

RETINS

Segment descriptions

Example: NAD+WS+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt+
+12345+DE'

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180 **SG5** C 1 2 **CTA-COM**

This segment group includes the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0190 12 **CTA** M 1 2 **Communication Partner**

Tag	Name	St	Format	Usage / Comments
CTA				
3139		N		Not used in the subset.
C056	DEPARTMENT OR STAFF DETAILS	M		
3413		N		Not used in the subset.
3412	Department or Processor	M	an..256	Name of the clerk or department.

Description: In the CTA segment, the name of the clerk responsible for the process can be transmitted for both the sender and the receiver.

Example: CTA++:Max Mustermann '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180		SG5	C	1	2	CTA-COM
------	--	------------	---	---	---	----------------

This segment group includes the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0200	13	COM	C	3	3	Communication link
------	----	------------	---	---	---	---------------------------

Tag	Name	St	Format	Usage / Comments
COM				
C076	COMMUNICATION CONNECTION	M		
3148	Communication number	M	an..512	
3155	Communication channel/service, qualifier	M	an..3	The following codes are available: EM E-mail FX Fax TE Telephone

Description: A segment for specifying the communication number and type for the contact or department indicated in the CTA segment.

Example: COM+max_mustermann@e_mail.de:EM'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0120		SG3	C	1	1	Different subscription address
This segment group includes the NAD segment as well as Segment Group 5 and is used to specify the partners involved in the message and their contacts. For example, the collection address of the tradesman.						
0130	14	NAD	M	1	1	Name and Address

Tag	Name	St	Format	Usage / Comments
NAD				
3035	PARTNER, QUALIFIER	M	an..3	The following codes are available: SF Collection address
C082	IDENTIFICATION OF THE PARTNER	C		
3039	Partner identification number, coded	M	an..35	Depending on the qualifier specified above, the partner's identification number is provided here.
1131		N		Not used in the subset.
3055	Managing organisation, coded	M	an..3	The following codes are available: 9 GLN (GS1 as the German issuer of GLN numbers) ZZZ bilaterally agreed (customer or supplier numbers)
C058		N		
3124		N		Not used in the subset.
C080	PARTNER NAME	M		
3036	Partner Name 1	M	an..35	Partner Name 1
3036	Partner Name 2	C	an..35	Partner Name 2.
3036	Partner Name 3	C	an..35	Partner Name 3.
C059	STREET	M		
3042	Street and house number	M	an..35	Building name/number and street name
3164	LOCATION	M	an..35	
C819		N		
3229		N		Not used in the subset.
3251	POSTCODE	M	an..17	
3207	COUNTRY, CODED	M	an..3	The most important country codes according to ISO 3166: AT Austria BE Belgium BG Bulgaria CA Canada CH Switzerland DE Germany DK Denmark ES Spain FI Finland FR France GB United Kingdom GR Greece IE Ireland IT Italy LU Luxembourg NL Netherlands NO Norway PT Portugal SE Sweden TR Turkey US USA

Description: In the NAD segment, details for identifying the involved partners as well as key address information are transmitted.

Example: NAD+SF+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt++12345+DE'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180		SG5	C	1	2	CTA-COM
------	--	------------	---	---	---	----------------

This segment group contains the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0190	15	CTA	M	1	2	Communication partner
------	----	------------	---	---	---	------------------------------

Tag	Name	St	Format	Usage / Comments
CTA				
3139		N		Not used in the subset.
C056	DEPARTMENT OR STAFF DETAILS	M		
3413		N		Not used in the subset.
3412	Department or Processor	M	an..256	Name of the clerk or department.

Description: In the CTA segment, the name of the clerk responsible for the process can be transmitted for both the sender and the receiver.

Example: CTA++:Max Mustermann '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180 **SG5** C 1 2 **CTA-COM**

This segment group contains the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0200 16 **COM** C 3 3 **Communication link**

Tag	Name	St	Format	Usage / Comments
COM				
C076	COMMUNICATION CONNECTION	M		
3148	Communication number	M	an..512	
3155	Communication channel/service, qualifier	M	an..3	The following codes are available: EM E-mail FX Fax TE Telephone

Description: A segment for specifying the communication number and type for the contact or department indicated in the CTA segment.

Example: COM+max_mustermann@e_mail.de:EM'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0120 **SG3** C 1 1 **Freight Forwarder**

This segment group includes the NAD segment as well as Segment Group 5 and is used to specify the partners involved in the message and their contacts.

0130 17 **NAD** M 1 1 **Name and Address**

Tag	Name	St	Format	Usage / Comments
NAD				
3035	PARTNER, QUALIFIER	M	an..3	The following codes are available: CA Forwarding Agent
C082	IDENTIFICATION OF THE PARTNER	C		
3039	Partner identification number, coded	M	an..35	Depending on the qualifier mentioned above, the partner's identification number is provided here.
1131		N		Not used in the subset.
3055	Managing organisation, coded	M	an..3	The following codes are available: 9 GLN (GS1 as the German issuer of GLN numbers) ZZZ bilaterally agreed (customer or supplier numbers)
C058		N		
3124		N		Not used in the subset.
C080	PARTNER NAME	C		
3036	Partner Name 1	M	an..35	Partner Name 1.
3036	Partner Name 2	C	an..35	Partner Name 2.
3036	Partner Name 3	C	an..35	Partner Name 3.
C059	STREET	C		
3042	Street and house number	M	an..35	Building name/number and street name
3164	LOCATION	C	an..35	
C819		N		
3229		N		Not used in the subset.
3251	POSTCODE	C	an..17	
3207	COUNTRY, CODED	C	an..3	The most important country codes according to ISO 3166: AT Austria BE Belgium BG Bulgaria CA Canada CH Switzerland DE Germany DK Denmark ES Spain FI Finland FR France GB United Kingdom GR Greece IE Ireland IT Italy LU Luxembourg NL Netherlands NO Norway PT Portugal SE Sweden TR Turkey US USA

Description: In the NAD segment, details for identifying the involved partners as well as key address information are transmitted.

Example: NAD+CA+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt+
+12345+DE'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0150		SG4	C	1	2	RFF
------	--	------------	---	---	---	------------

This segment group includes the RFF segment. It contains references to the partner specified in the NAD segment.

0160	18	RFF	M	1	2	Reference Details
------	----	------------	---	---	---	--------------------------

Tag	Name	St	Format	Usage / Comments
RFF				
C506	REFERENCE DETAILS	M		
1153	Reference, Qualifier	M	an..3	Code does not correspond to any UN/EDIFACT code list. Constant value: API Additional partner identification* (e.g. own identification number with the partner)
1154	Reference Number	M	an..70	

Description: This segment is used to specify references relating to the partner identified in the preceding NAD segment. This could be, for example, one's own identification number with the partner as a supplement to the GLN number.

Example: RFF+API:12345 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180		SG5	C	1	2	CTA-COM
------	--	------------	---	---	---	----------------

This segment group includes the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0190	19	CTA	M	1	2	Communication partner
------	----	------------	---	---	---	------------------------------

Tag	Name	St Format	Usage / Comments
CTA			
3139		N	Not used in the subset.
C056	DEPARTMENT OR PROCESSOR	M	
3413		N	Not used in the subset.
3412	Department or Processor	M an..256	Name of the clerk or department.

Description: In the CTA segment, the name of the person responsible for the process can be transmitted for both the sender and the receiver.

Example: CTA++:Max Mustermann '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180 **SG5** C 1 2 **CTA-COM**

This segment group includes the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0200 20 **COM** C 3 3 **Communication link**

Tag	Name	St	Format	Usage / Comments
COM				
C076	COMMUNICATION CONNECTION	M		
3148	Communication number	M	an..512	
3155	Communication channel/service, qualifier	M	an..3	The following codes are available: EM E-mail FX Fax TE Telephone

Description: A segment for specifying the communication number and type for the contact or department indicated in the CTA segment.

Example: COM+max_mustermann@e_mail.de:EM'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0120		SG3	C	1	1	Return delivery address
This segment group includes the NAD segment as well as Segment Group 5 and is used to specify the partners involved in the message and their contacts. Return address at the manufacturer.						
0130	21	NAD	M	1	1	Name and Address

Tag	Name	St	Format	Usage / Comments
NAD				
3035	PARTNER, QUALIFIER	M	an..3	The following codes are available: ST Return address
C082	IDENTIFICATION OF THE PARTNER	C		
3039	Partner identification number, coded	M	an..35	Depending on the qualifier mentioned above, the partner's identification number is provided here.
1131		N		Not used in the subset.
3055	Managing organisation, coded	M	an..3	The following codes are available: 9 GLN (GS1 as the German issuer of GLN numbers) ZZZ bilaterally agreed (customer or supplier numbers)
C058		N		
3124		N		Not used in the subset.
C080	PARTNER NAME	M		
3036	Partner Name 1	M	an..35	Partner Name 1.
3036	Partner Name 2	C	an..35	Partner Name 2.
3036	Partner Name 3	C	an..35	Partner Name 3.
C059	STREET	M		
3042	Street and house number	M	an..35	Building name/number and street name
3164	LOCATION	M	an..35	
C819		N		
3229		N		Not used in the subset.
3251	POSTCODE	M	an..17	
3207	COUNTRY, CODED	M	an..3	The most important country codes according to ISO 3166: AT Austria BE Belgium BG Bulgaria CA Canada CH Switzerland DE Germany DK Denmark ES Spain FI Finland FR France GB United Kingdom GR Greece IE Ireland IT Italy LU Luxembourg NL Netherlands NO Norway PT Portugal SE Sweden TR Turkey US USA

Description: In the NAD segment, details for the identification of the involved partners as well as key address information are transmitted.

Example: NAD+ST+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt++12345+DE'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180 **SG5** C 1 2 **CTA-COM**

This segment group includes the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0190 22 **CTA** M 1 2 **Communication Partner**

Tag	Name	St	Format	Usage / Comments
CTA				
3139		N		Not used in the subset.
C056	DEPARTMENT OR PROCESSOR	M		
3413		N		Not used in the subset.
3412	Department or Processor	M	an..256	Name of the clerk or department.

Description: In the CTA segment, the name of the clerk responsible for the process can be transmitted for both the sender and the receiver.

Example: CTA++:Max Mustermann '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0180 **SG5** C 1 2 **CTA-COM**

This segment group includes the CTA segment for specifying the contact person and the COM segment for indicating the communication connection.

0200 23 **COM** C 3 3 **Communication link**

Tag	Name	St	Format	Usage / Comments
COM				
C076	COMMUNICATION CONNECTION	M		
3148	Communication number	M	an..512	
3155	Communication channel/service, qualifier	M	an..3	The following codes are available: EM E-Mail FX Fax TE Telephone

Description: A segment for specifying the communication number and type for the contact or department indicated in the CTA segment.

Example: COM+max_mustermann@e_mail.de:EM'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0400		SG11	M	9999	1	LIN-PIA-IMD-QTY-SG13-SG18
0410	24	LIN	M	1	1	Position Data

Tag	Name	St Format	Usage / Comments
LIN			
1082	ITEM NUMBER	M n..6	Current item number.
1229		N	Not used in the subset.
C212	PRODUCT IDENTIFICATION	M	
7140	Product/Service Number	M an..35	Item number of the returned item
7143	Item/Service Number, Coded	M an..3	The following codes are available: EN GTIN number MF Factory item number

Description: In the LIN segment, following a sequential item number, the item number of the return item is transmitted.

Example: LIN+1++1:MF'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0400		SG11	M	9999	1	LIN-PIA-IMD-QTY-SG13-SG18
0420	25	PIA	C	9	2	Additional product identification

Tag	Name	St	Format	Usage / Comments
PIA				
4347	Product Identification Function, Coded	M	an..3	Constant value: 1 Additional identification
C212	PRODUCT IDENTIFICATION	M		
7140	Product/Service Number	M	an..35	Number associated with the product.
7143	Product/Service Number, Coded	M	an..3	The codes marked with * do not correspond to any UN/EDIFACT code list. The following codes are available: NB Batch number SN Serial number SNe first serial number (sequence of serial numbers)* SNI last serial number (sequence of serial numbers)*
C212	PRODUCT IDENTIFICATION	C		
7140	Product/Service Number	M	an..35	Number associated with the product.
7143	Item/Service Number, Coded	M	an..3	The codes marked with * do not correspond to any UN/EDIFACT code list. The following codes are available: NB Batch number SN Serial number SNe first serial number (sequence of serial numbers)* SNI last serial number (sequence of serial numbers)*
C212	PRODUCT IDENTIFICATION	C		
7140	Product/Service Number	M	an..35	Number associated with the product.
7143	Item/Service Number, Coded	M	an..3	The codes marked with * do not correspond to any UN/EDIFACT code list. The following codes are available: NB Batch number SN Serial number SNe first serial number (sequence of serial numbers)* SNI last serial number (sequence of serial numbers)*
C212	PRODUCT IDENTIFICATION	C		
7140	Product/Service Number	M	an..35	Number associated with the product.
7143	Item/Service Number, Coded	M	an..3	The codes marked with * do not correspond to any UN/EDIFACT code list. The following codes are available: NB Batch number SN Serial number SNe first serial number (sequence of serial numbers)* SNI last serial number (sequence of serial numbers)*
C212	PRODUCT IDENTIFICATION	C		
7140	Product/Service Number	M	an..35	Number associated with the product.
7143	Item/Service Number, Coded	M	an..3	The codes marked with * do not correspond to any UN/EDIFACT code list. The following codes are available: NB Batch number SN Serial number

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Tag	Name	St Format	Usage / Comments
			SNe first serial number (sequence of serial numbers)* SNI last serial number (sequence of serial numbers)*

Description: This segment is used to provide additional product identifications for the current item.

Example: PIA+1+12345:NB+12345:NB+12345:NB+12345:NB '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0400		SG11	M	9999	1	LIN-PIA-IMD-QTY-SG13-SG18
0430	26	IMD	C	2	2	Specification of the item

Tag	Name	St	Format	Usage / Comments
IMD				
7077		N		Not used in the subset.
C272		N		
7081		N		Not used in the subset.
C273	DESCRIPTION OF THE ITEM	M		
7009	Description of the item	M	an..17	SP Specification of the item
1131		N		Not used in the subset.
3055		N		Not used in the subset.
7008	Description of the item	M	an..40	Positions 1-40.

Description: The segment is used when there is no item number available, or there is no unique number. To specify the item, 2*40 character positions of item text are available by repeating the IMD segment twice.

Example: IMD+++SP::Freitext Freitext Freitext Freitext '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0400		SG11	M	9999	1	LIN-PIA-IMD-QTY-SG13-SG18
0460	27	QTY	M	1	2	Quantity

Tag	Name	St	Format	Usage / Comments
QTY				
C186	QUANTITY DETAILS	M		
6063	Quantity, Qualifier	M	an..3	Constant value: 61 Return quantity
6060	Quantity	M	n..15	Quantity with up to three decimal places.
6411	Unit of measure, qualifier	M	an..8	The following codes are available: CMK Square centimetre CMQ Cubic Centimetre CMT Centimetre DZN Dozen GRM Grams HLT Hecto-Litre HUR Hour KGM Kilogram KTM Kilometre LTR Liter MIN Minute MMT Millimetre MTK Square Metre MTQ Cubic Metre MTR Meter PAK Package PCE Piece PR Pair RO Number of rolls SET Record TNE Tonne UI Work Units

Description: In the QTY segment, information about the quantity and the unit of measure is transmitted.

Example: QTY+61:1:CMK'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0530		SG13	M	1	2	RFF-DTM
------	--	-------------	---	---	---	----------------

This segment group includes the RFF segment for referencing the item to items from previous documents.

0540	28	RFF	M	1	2	Reference Details
------	----	------------	---	---	---	--------------------------

Tag	Name	St	Format	Usage / Comments
RFF				
C506	REFERENCE DETAILS	M		
1153	Reference, Qualifier	M	an..3	The following codes are available: 70E Return goods enquiry number
1154	Reference Number	M	an..70	Reference number, related to the qualifier selected in data element 1153.
1156	Document line identifier	M	n..6	

Description: In the RFF segment, the item number within the product return enquiry is transmitted.

Example: RFF+70E:1:1'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
--------	----	---------	----	---------	-------	------

0530		SG13	M	1	2	RFF-DTM
------	--	-------------	---	---	---	----------------

This segment group includes the RFF segment for referencing the item to items from previous documents.

0550	29	DTM	M	9	3	Date/time/period
------	----	------------	---	---	---	-------------------------

Tag	Name	St	Format	Usage / Comments
DTM				
C507	Date/time/period	M		
2005	Date/Time/Period Details, Qualifiers	M	an..3	Constant value: 171 Reference date
2380	Date/Time/Period Details	M	an..35	Date, formatted as shown in data element 2379.
2379	Date/Time/Period Details, Format, Qualifier	M	an..3	The following codes are available: 102 Format: YYYYMMDD 203 Format: YYYYMMDDHHMM

Example: DTM+171:311220000000:203 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0690		SG18	C	1	2	Reason for Rejection
0700	30	CDI	M	1	2	Item Status / Reason for Rejection

Tag	Name	St	Format	Usage / Comments
CDI				
7001	QUALIFIER ITEM STATUS	M	an..3	Constant value: 3E In case of goods return (GS1 Code)
C564	ITEM STATUS	M		
7007	Item Status	M	an..3	Item status, coded 17E Return will be rejected. (GS1 Code) 22I Goods are excluded from return.
1131		N		Not used in the subset.
3055		N		Not used in the subset.
7006	Item Status Description	C	an..70	Reason for rejection

Description: In the CDI segment, information about the item status is transmitted.

Example: CDI+3E+17E:::Beschreibung des Artikelstatus'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0690		SG18	C	1	2	Reason for Rejection
0730	31	FTX	C	1	3	Free text

Tag	Name	St	Format	Usage / Comments
FTX				
4451	TEXT, QUALIFIER	M	an..3	The following codes are available: NAI Rejection information
4453		N		Not used in the subset.
C107		N		
4441		N		Not used in the subset.
C108	FREE TEXT	C		
4440	Free Text	M	an..512	
4440	Free Text	C	an..512	
4440	Free text	C	an..512	
4440	Free Text	C	an..512	
4440	Free Text	C	an..512	

Description: In the FTX segment, additional text regarding the return of goods can be transmitted.

Example: FTX+NAI+++Freitext:Freitext:Freitext:Freitext:Freitext '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0690		SG18	C	5	2	Desired action
0700	32	CDI	M	1	2	Item Status

Tag	Name	St Format	Usage / Comments
CDI			
7001	QUALIFIER ITEM STATUS	M an..3	Constant value: 3E In case of goods return (GS1 Code)
C564	ITEM STATUS	M	
7007	Item Status	M an..3	Item status, coded 12E Goods can be returned to the wholesaler 14E Goods can be disposed of by the wholesaler 20I Goods to be collected by the supplier 21I The supplier's field service will make contact
1131		N	Not used in the subset.
3055		N	Not used in the subset.
7006	Item Status Description	C an..70	Description of the item status

Description: In the CDI segment, information about the item status is transmitted.

Example: CDI+3E+12E:::Beschreibung des Artikelstatus'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0690		SG18	C	5	2	Desired action
0720	33	DTM	C	2	3	Date/Time/Period Details

Tag	Name	St	Format	Usage / Comments
DTM				
C507	DATE/TIME/PERIOD DETAILS	M		
2005	Date/Time/Period Details	M	an..3	The following codes are available: 200 Collection date 63 Return period until 64 Return period from
2380	Date/Time/Period Details	M	an..35	Date, formatted as shown in data element 2379.
2379	Date/Time/Period Details, Format, Qualifier	M	an..3	The following codes are available: 102 YYYYMMDD (Year, Month, Day) 203 YYYYMMDDHHMM (Year, Month, Day, Hour, Minute)

Description: In the DTM segment, details of the delivery date that differ from those in the header can be provided for individual items. The aim is to specify a delivery arrival date on a daily basis.

Example: DTM+200:20141016:102'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0690		SG18	C	5	2	Desired action
0730	34	FTX	C	1	3	Free Text

Tag	Name	St	Format	Usage / Comments
FTX				
4451	TEXT, QUALIFIER	M	an..3	The following codes are available: AAI General Information
4453		N		Not used in the subset.
C107		N		
4441		N		Not used in the subset.
C108	FREE TEXT	C		
4440	Free Text	M	an..512	
4440	Free Text	C	an..512	
4440	Free Text	C	an..512	
4440	Free Text	C	an..512	
4440	Free Text	C	an..512	

Description:

In the FTX segment, additional text regarding goods return can be transmitted.

Example:

FTX+AAI+++Freitext:Freitext:Freitext:Freitext:Freitext '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0860	35	UNT	M	1	0	Message End Segment

Tag	Name	St Format	Usage / Comments
UNT			

Description: In the UNT segment, the number of segments and a message reference number are transmitted for plausibility checks.

Example: UNT

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segment descriptions

Number	No	Segment	St	MaxRep.	Level	Name
0000	36	UNZ	M	1	0	Data Segment End

Tag	Name	St Format	Usage / Comments
UNZ			

Description: In the UNZ segment, a data exchange counter and a data exchange reference can be transmitted.

Example: UNZ

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Example

No	Desc	Example
01	UNA	UNA:+,? '
02	UNB	UNB
03	UNH	UNH
04	BGM	BGM+71E+1+9'
05	DTM	DTM+137:20211231:102'
06	FTX	FTX+ORI+++Hier steht:der ORI Text:als freier Text:Hier kann ein:beliebiger Text stehen'
07	FTX	FTX+OSI+++Hier steht:ein Text aufgrund:von:gesetzlichen:Anforderungen'
	SG3	
08	NAD	NAD+SU+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt++1 2345+DE'
	SG5	
09	CTA	CTA++:Max Mustermann'
10	COM	COM+max_mustermann@e_mail.de:EM'
	SG3	
11	NAD	NAD+WS+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt++1 2345+DE'
	SG5	
12	CTA	CTA++:Max Mustermann'
13	COM	COM+max_mustermann@e_mail.de:EM'
	SG3	
14	NAD	NAD+SF+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt++12 345+DE'
	SG5	
15	CTA	CTA++:Max Mustermann'
16	COM	COM+max_mustermann@e_mail.de:EM'
	SG3	
17	NAD	NAD+CA+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt++1 2345+DE'
	SG4	
18	RFF	RFF+API:12345'
	SG5	
19	CTA	CTA++:Max Mustermann'
20	COM	COM+max_mustermann@e_mail.de:EM'
	SG3	
21	NAD	NAD+ST+4012400000000::9++Max:Maximilian:Mustermann+Musterstr. 16+Musterstadt++12 345+DE'
	SG5	
22	CTA	CTA++:Max Mustermann'
23	COM	COM+max_mustermann@e_mail.de:EM'
	SG11	
24	LIN	LIN+1++1:MF'
25	PIA	PIA+1+12345:NB+12345:NB+12345:NB+12345:NB+12345:NB'
26	IMD	IMD+++SP:::Freitext Freitext Freitext Freitext'
27	QTY	QTY+61:1:CMK'
	SG13	
28	RFF	RFF+70E:1:1'
29	DTM	DTM+171:311220000000:203'
	SG18	
30	CDI	CDI+3E+17E:::Beschreibung des Artikelstatus'
31	FTX	FTX+NAI+++Freitext:Freitext:Freitext:Freitext:Freitext'
	SG18	

No = Consecutive segment number in the guide

Desc = Object identifier

Example

No	Desc	Example
32	CDI	CDI+3E+12E:::Beschreibung des Artikelstatus'
33	DTM	DTM+200:20141016:102'
34	FTX	FTX+AAI+++Freitext:Freitext:Freitext:Freitext:Freitext'
35	UNT	UNT
36	UNZ	UNZ